

JL Python 14" Upright Auto Scrubber - Battery Powered

Troubleshooting Guide



This is what the rubber of the squeegee should look like during water pick-up





Below images show the correct position of the regulators and the rubber




Incorrect Position



Correct Position

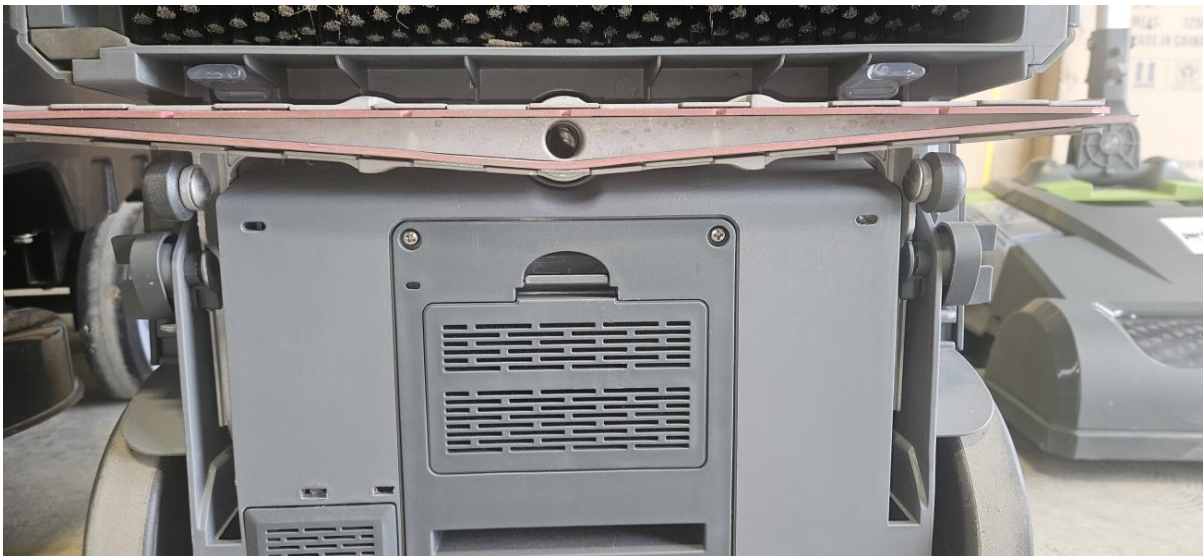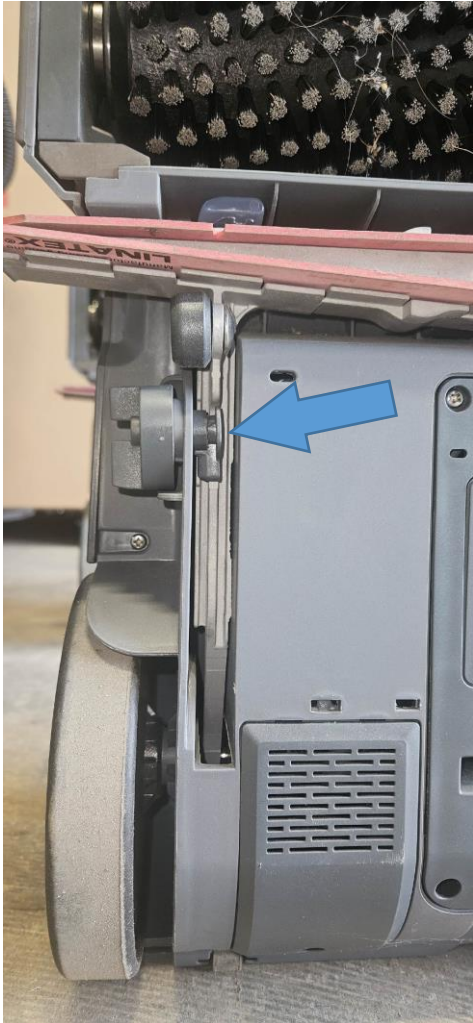

Pull out the parts below to detach the squeegee

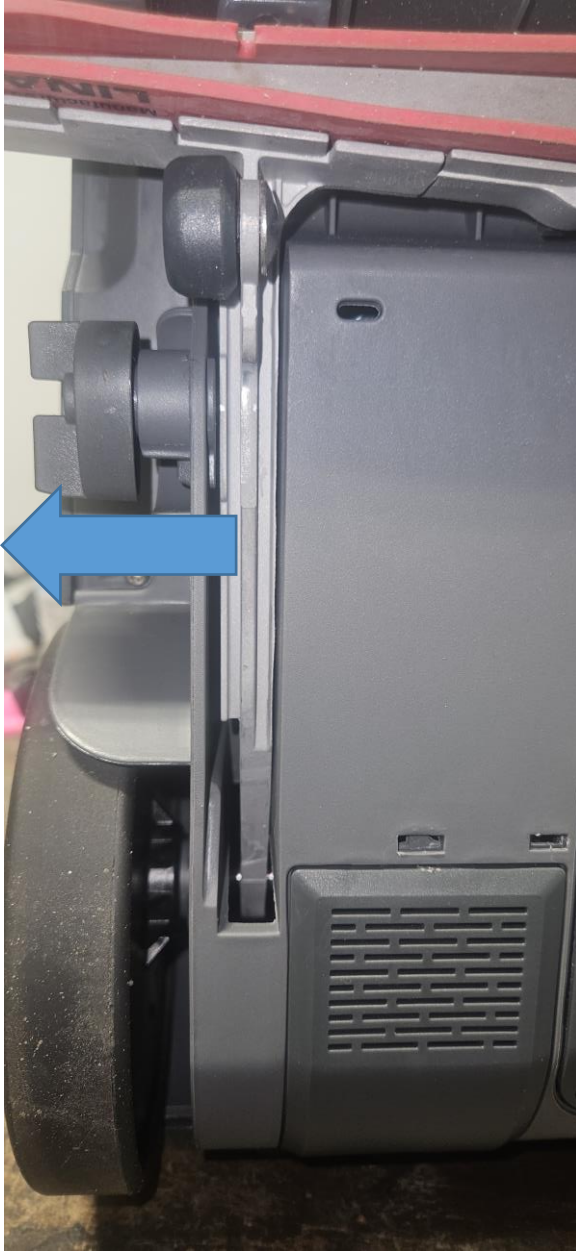

You can now pull down the squeegee



To remove, turn the butterfly joints clockwise; then, pull the squeegee down (Fig. 3)


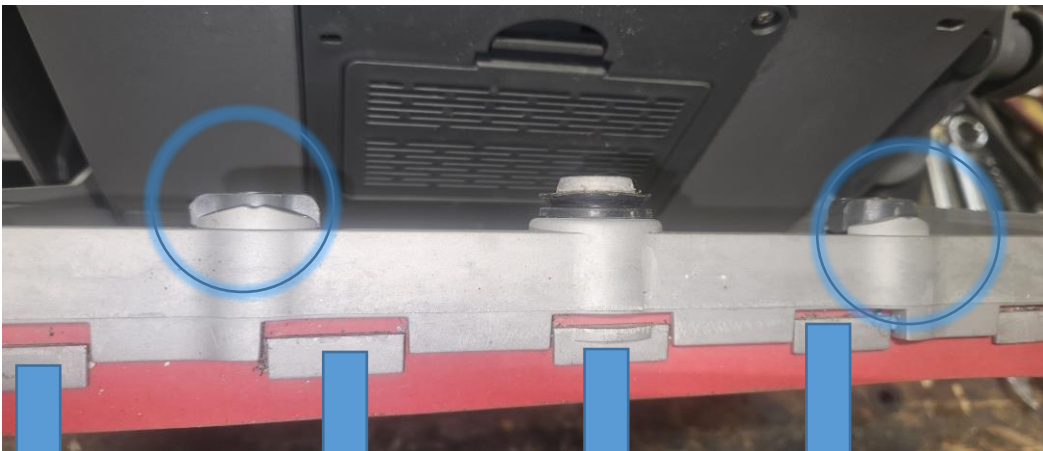


Fig. 3



Pull out the rubber blade to remove and replace with a new one

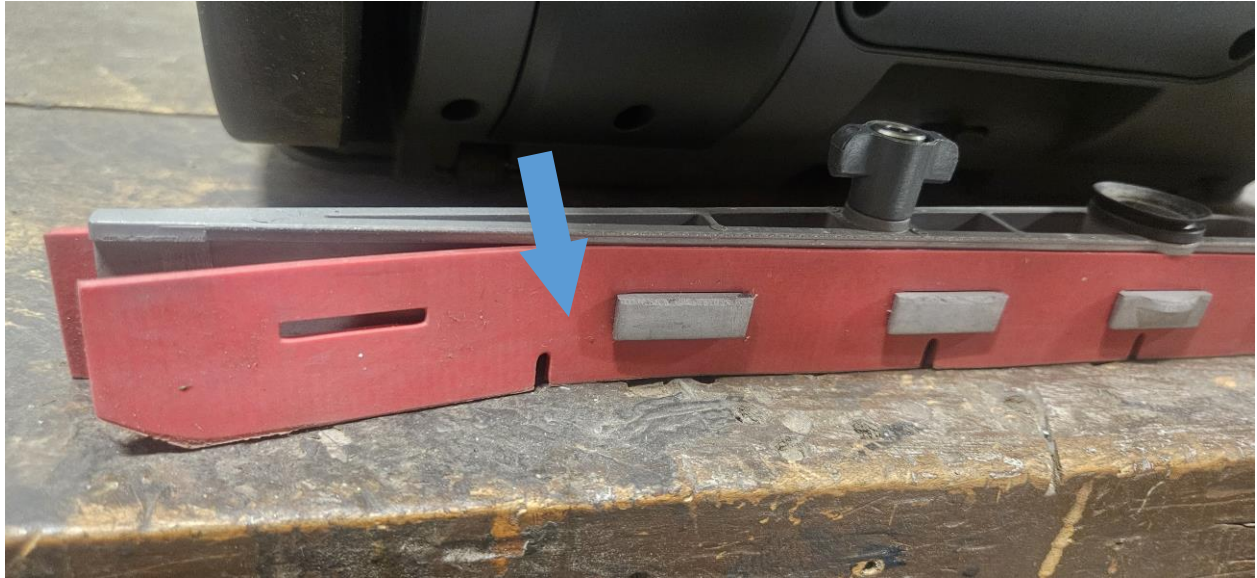

Press the clip down to take out the air filter; clean the air filter regularly for optimal performance of the machine.

