



Charger 2716 DB Plus

바닥 먼지흡수 및 광택기

\$10,950



The most productive walk-behind battery burnisher available today, the Charger 2716 DB Plus produces a wet-look shine, previously only attainable with a propane buffer.

- Up to 4 hours of run time for increased productivity.
- 0-70 pounds of pad pressure for that brilliant, high gloss shine.
- 7-gauge steel frame provides a strong, rugged base for this burnisher.
- Quiet operation (only 71 dbA) much less disruptive to customers and co-workers.
- Low profile offset pad driver makes burnishing under shelves easy.
- Two-wheel drive with differential results in the most maneuverable 27" battery burnisher available today.
- Variable-speed wheel drive, forward and reverse, allows the operator to match the machine's drive speed to his comfortable working pace.

NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA



Charger 2716 DB Plus Specifications

PAD SPEED	1600 RPM	OVERLOAD PROTECTION	90 amp reset circuit breaker	SWITCHES	Master on/off. Safety switch prevents accidental pad rotation in raised position. Twist grip.
PAD SIZE	27-in. (68.5 cm)				
PAD DRIVER	27-in. (68.5 cm)	DRIVE SYSTEM	Differential chain drive		
MOTOR Type Voltage HP RPM (Full load)	DC permanent magnet 36 volt 3 HP 1500	DRIVE SPEED	Variable, up to 246 ft./min. (75 m) forward (reverse 60%)	DIMENSIONS Length Width Height	59-in. (150 cm) 30-in. (76 cm) 39-in. (99 cm)
		CONSTRUCTION Frame Housing	7-gauge steel Rotocast polyethylene	WEIGHT Machine Only Machine w/batts.	312 lbs. (142 kg) 918 lbs. (417 kg)
BATTERIES	6-6V 325 AH	WHEELS	Two (2) 9-in. (23 cm) front wheels, one (1) rear 4-in. (10 cm) caster	SHIPPING WEIGHT	988 lbs. (449 kg) with batteries
SOUND LEVEL	71 dbA		WARRANTY	3 Years Limited 10 Years Polyethylene	



The six 6V, 325 AH batteries provide up to 4 hours of run time, increasing productivity.




The Vac-Trac™ Dust Control System collects pad dust in a filter bag at the front of the machine (under the sliding battery compartment lid).



Using the tilt-lever at the rear of the machine, the Charger 2716 DB Plus can be tipped from its operating position...



...to the transport position ...

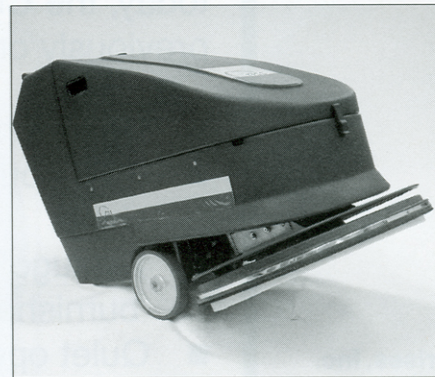

...or higher to the pad change position.



NSS® Enterprises, Inc.
 3115 Frenchmens Road
 Toledo, Ohio 43607-2958 USA
 419/531-2121 Fax 419/531-3761
www.nss.com
mailus@nss.com
 Specifications subject to change without notice.

DISTRIBUTED BY

Printed in USA

©2003 NSS Enterprises, Inc.

#9096445